

## WLL180T-N474

WLL180T

**FIBER-OPTIC SENSORS** 





#### Ordering information

Туре	Part no.
WLL180T-N474	6039619

Included in delivery: BEF-WLL180 (1)

Other models and accessories → www.sick.com/WLL180T

Illustration may differ









#### Detailed technical data

#### **Features**

realures	
Туре	Stand-alone Stand-alone
Dimensions (W x H x D)	10.5 mm x 34.6 mm x 71.9 mm
Housing design (light emission)	Rectangular
Sensing range max.	0 mm 1,000 mm, Through-beam system $^{1)}$ $^{2)}$
Sensing range	0 mm 400 mm, Proximity system $^{3)}$ $^{4)}$ 0 m 850 mm, Through-beam system $^{1)}$ $^{2)}$
Focus	5)
Type of light	Infrared light
Light source	LED <sup>6)</sup>
Angle of dispersion	Approx. 65° 5)
Wave length	1,450 nm
Adjustment	Menu-controlled Single teach-in button Cable
Delay time	Programmable, 0 ms 9,999 ms
Time functions	Without time delay Off delay On delay ON and OFF delay One shot
Indication	Display
Display	LED status display / $2x$ 4-character digital dual displays, Set value (green indicator) and actual value (red indicator) are displayed simultaneously, display of parameters

 $<sup>^{1)}</sup>$  Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T).

<sup>3)</sup> Objects to be sensed with 90% reflectivity (based on DIN 5033 white standard). Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T).

<sup>&</sup>lt;sup>4)</sup> LL3-DW01.

 $<sup>^{5)}</sup>$  See LL3 fiber-optic data.

 $<sup>^{6)}</sup>$  Average service life: 100,000 h at  $T_{U}$  = +25 °C.

#### **Special features**

Glass fibers necessary

#### Mechanics/electronics

Supply voltage	12 V DC 24 V DC <sup>1)</sup>
Ripple	≤ 10 % <sup>2)</sup>
Power consumption	50 mA <sup>3)</sup>
Switching output	NPN
Number of switching outputs	1
Switching mode	Light/dark switching
Switching mode selector	Manually selectable
Output current I <sub>max.</sub>	≤ 100 mA
Response time	$\leq$ 16 µs, $\leq$ 70 µs, $\leq$ 250 µs, $\leq$ 2,000 µs, $\leq$ 8,000 µs $^{4)}$
Switching frequency	31.2 kHz 7.1 kHz 2 kHz 250 Hz 62.5 Hz
Time functions	Without time delay Off delay On delay ON and OFF delay One shot
Delay time	Programmable, 0 ms 9,999 ms
Input	Multifunctional input MF
Connection type	Male connector M8, 4-pin
Circuit protection	A <sup>5)</sup> B <sup>6)</sup> C <sup>7)</sup> D <sup>8)</sup>
Protection class	III
Weight	20 g
Housing material	Plastic, ABS/PC
Enclosure rating	IP50 <sup>9)</sup>

<sup>&</sup>lt;sup>1)</sup> +- 10%.

 $<sup>^{1)}</sup>$  Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T).

<sup>&</sup>lt;sup>2)</sup> LL3-TW01

<sup>3)</sup> Objects to be sensed with 90% reflectivity (based on DIN 5033 white standard). Sensing range with 8 ms response time. Reduction with shorter response time (see tables LL3/WLL180T).

<sup>&</sup>lt;sup>4)</sup> LL3-DW01.

<sup>&</sup>lt;sup>5)</sup> See LL3 fiber-optic data.

 $<sup>^{6)}</sup>$  Average service life: 100,000 h at TU = +25 °C.

 $<sup>^{2)}\,\</sup>mathrm{May}$  not exceed or fall below  $\mathrm{U}_{\mathrm{V}}$  tolerances.

<sup>3)</sup> Without load.

<sup>&</sup>lt;sup>4)</sup> Selectable.

 $<sup>^{5)}</sup>$  A =  $\rm V_{S}$  connections reverse-polarity protected.

 $<sup>^{6)}</sup>$  B = inputs and output reverse-polarity protected.

<sup>7)</sup> C = interference suppression.

<sup>8)</sup> D = outputs overcurrent and short-circuit protected.

<sup>9)</sup> With correctly attached fibre-optic cable LL3 and closed protection hood.

Items supplied	BEF-WLL180 mounting bracket
Ambient operating temperature	-25 °C +55 °C
Ambient storage temperature	-40 °C +70 °C
UL File No.	NRKH.E300503 & NRKH7.E300503

<sup>&</sup>lt;sup>1)</sup> +- 10%.

#### Safety-related parameters


MTTF <sub>D</sub>	320 years
DC <sub>avg</sub>	0%

#### Classifications

ECI@ss 5.0	27270905
ECI@ss 5.1.4	27270905
ECI@ss 6.0	27270905
ECI@ss 6.2	27270905
ECI@ss 7.0	27270905
ECI@ss 8.0	27270905
ECI@ss 8.1	27270905
ECI@ss 9.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
UNSPSC 16.0901	39121528

#### Adjustments possible

#### WLL180T



- ③ Locking the fiber-optic cables
- $\begin{tabular}{ll} \hline \end{tabular}$  LED indicator orange, lights up when switching output is active
- ® Numeric display 2 x 4-digit; green: switching threshold, operating mode; red: actual value, Teach-in and function parameter
- Step pushbutton > (manual switching threshold: higher/next function parameter)
- Step pushbutton < (manual switching threshold: lower/previous function parameter)</p>
- 1 Mode/Enter-button
- 1 Teach-in button

 $<sup>^{2)}\,\</sup>mbox{May}$  not exceed or fall below  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

<sup>3)</sup> Without load.

<sup>&</sup>lt;sup>4)</sup> Selectable.

 $<sup>^{5)}</sup>$  A =  $V_S$  connections reverse-polarity protected.

 $<sup>^{6)}</sup>$  B = inputs and output reverse-polarity protected.


 $<sup>^{7)}</sup>$  C = interference suppression.

 $<sup>^{\</sup>rm 8)}$  D = outputs overcurrent and short-circuit protected.

<sup>&</sup>lt;sup>9)</sup> With correctly attached fibre-optic cable LL3 and closed protection hood.


#### Connection diagram

Cd-134



#### Dimensional drawing (Dimensions in mm (inch))

Stand-alone

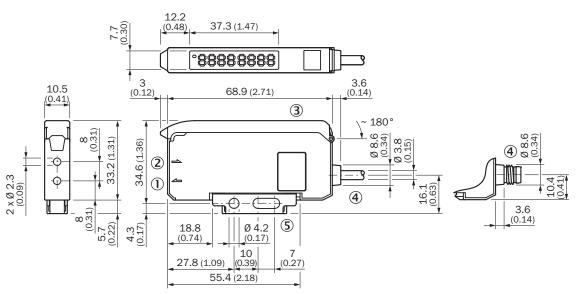

- ① Sender LED, installation of LL3 fibre-optic cable (sender fibre)
- ② Receiver, installation of LL3 fibre optic cable (receiver fibre)
- 3 Protective hood opens approx. 180°
- 4 Connection
- ⑤ Mounting bracket, included with delivery

#### Recommended accessories

Other models and accessories → www.sick.com/WLL180T

	Brief description	Туре	Part no.	
Mounting brad	Mounting brackets and plates			
3 80	Mounting bracket, steel, zinc coated, without mounting hardware	BEF-WLL180	5325812	
Other mounting accessories				
	Rail end piece for block mounting, stainless steel, mounting hardware included	BEF-EB01-W190	5313011	

# WLL180T-N474 | WLL180T FIBER-OPTIC SENSORS

	Brief description	Туре	Part no.	
Plug connecto	Plug connectors and cables			
	Head A: female connector, M8, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 2 m	YF8U14- 020VA3XLEAX	2095888	
	Head A: female connector, M8, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF8U14- 050VA3XLEAX	2095889	
	Head A: female connector, M8, 4-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 2 m	YG8U14- 020VA3XLEAX	2095962	
	Head A: female connector, M8, 4-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YG8U14- 050VA3XLEAX	2095963	

#### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

